

Data UI Conversion

Servoy allows conversion from the data shown in the UI elements to the data used in dataProviders. By default a datapropositor value is used directly in a UI element. The UI element must support the data type and knows how to handle it.

A UI converter can be configured to realize the conversion between the datapropositor data and UI data.

For example, a datetime datapropositor can be shown and edited in a calendar UI element. With a UI converter, one can use any datapropositor type in any UI element.



UI converters are currently not supported by the **Solution Model**.

In This Chapter

- [Configuring UI Converters in Form Editor](#)
- [Built-in UI Converter \(GlobalMethodConverter\)](#)
- [UI Converter from Java Code \(plugin\)](#)

Configuring UI Converters in Form Editor

The UI converter is configured at element level in the form editor. It is edited as part of the format property of an element.

The format property editor allows configuration of the UI converter (mark the checkbox and select one of the available converters).

Built-in UI Converter (GlobalMethodConverter)

Servoy delivers one built-in UI converter, the GlobalMethodConverter, which can also be used as database value converter. The GlobalMethodConverter has 3 properties:

- `fromObjectMethodName`
The global method that converts from UI value to datapropositor value
- `toObjectMethodName`
The global method that converts from datapropositor value to UI value
- `type` (one of TEXT, INTEGER, NUMBER, DATETIME or MEDIA)
The UI data type (so the resulting type of the toObjectMethodName method).


Example of configuring a UI converter for a form element using the GlobalMethodConverter: This example shows the conversion of null values to '-' in the UI.

Defining the converter methods in *globals.js*:

```
function nullToDash() {
    var nr = arguments[0];
    if(nr == null)
        return '-';
    return nr;
}

function dashToNull() {
    var nr = arguments[0];
    if(nr == '-')
        return null;
    return nr;
}
```


Configuring the UI converter of field 'fldAge' format property:

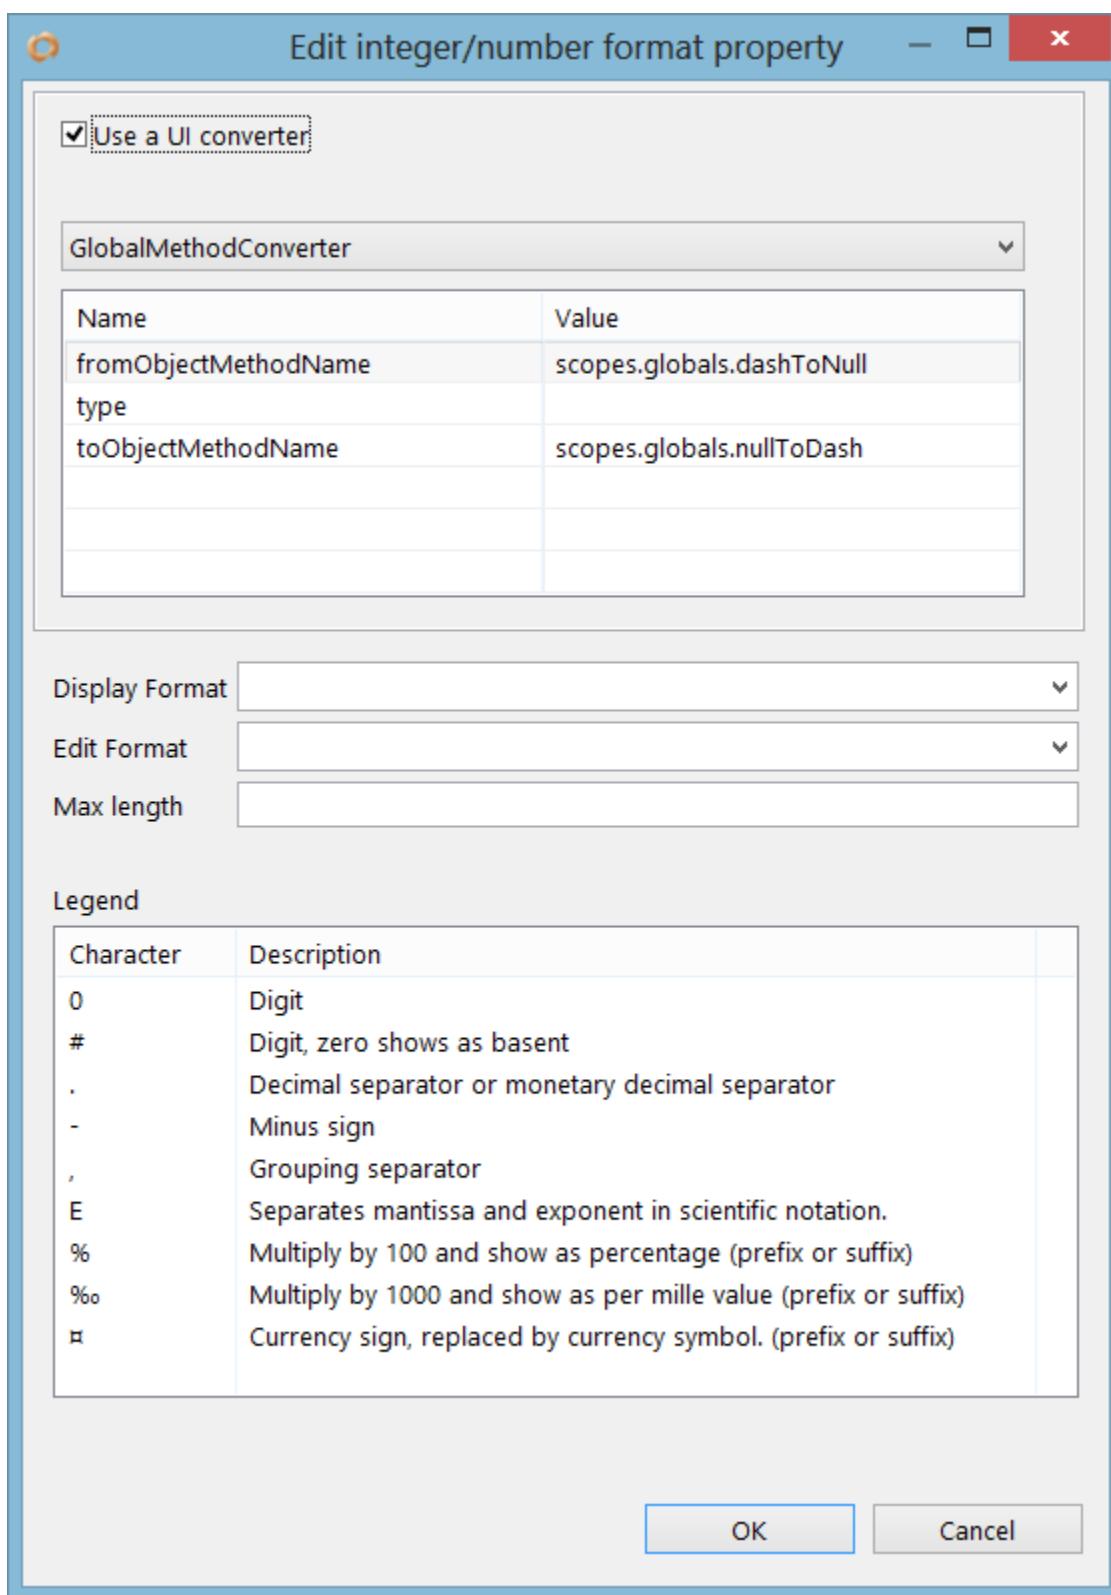

Code that tests the dataprovider/UI value:

```
/** @type {JSRecord<db:/example_data/employees>} */
var rec = foundset.getSelectedRecord();
if(rec.age == null) {
    application.output('Dataprovider value: null')
    application.output('UI value:' + elements.fldAge)
}
```

The image below shows how data is displayed in the UI:

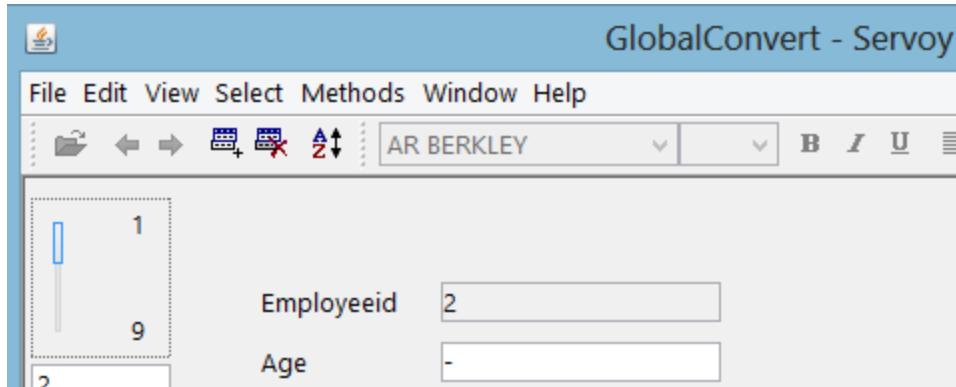

UI Converter from Java Code (plugin)

A UI converter can be contributed by a Java plugin.

See [Providing UI Converters from Plugins](#) for an example on how to implement a plugin which provides a UI converter.